


Harness and instrument panel Beam pre-assembly

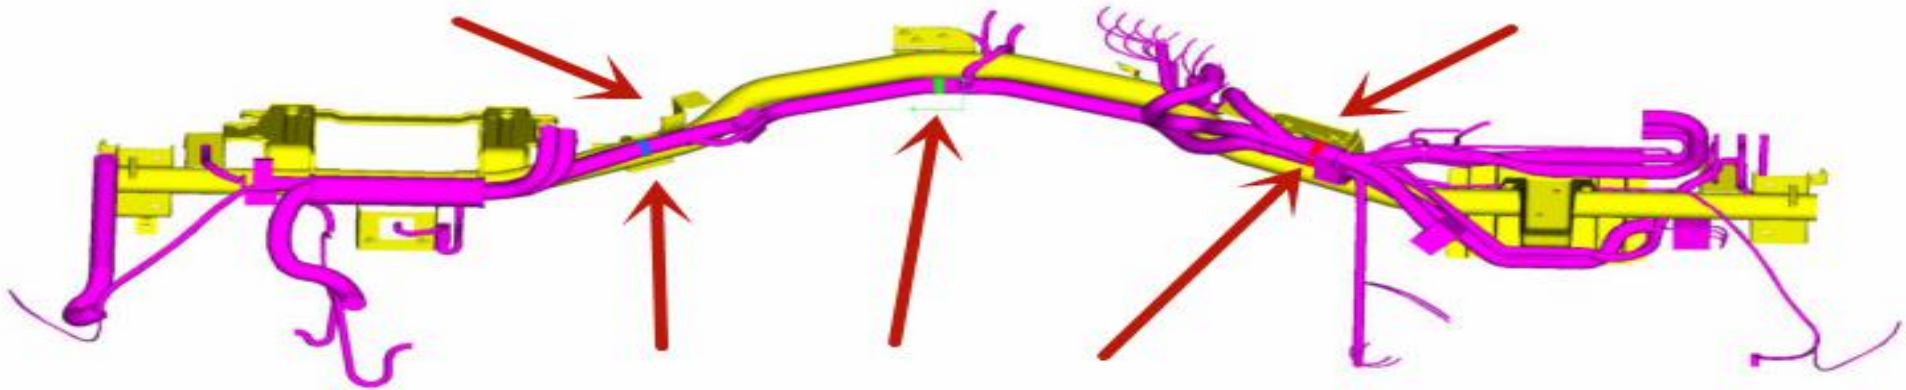

instrument panel beam:

1. Fix the main harness and the rocker switch harness to the square hole on the left side of the back of the hand brake valve bracket at the position of the red positioning belt;
2. The strap is fixed to the right side of the right bracket of the hood at the position of the blue positioning belt;
3. Fix the harness to the right side of the middle bracket of the beam at the position of the green positioning belt.